
FIELD NOTES of part of

T. 9 S. R. 1 W. S.B.M.

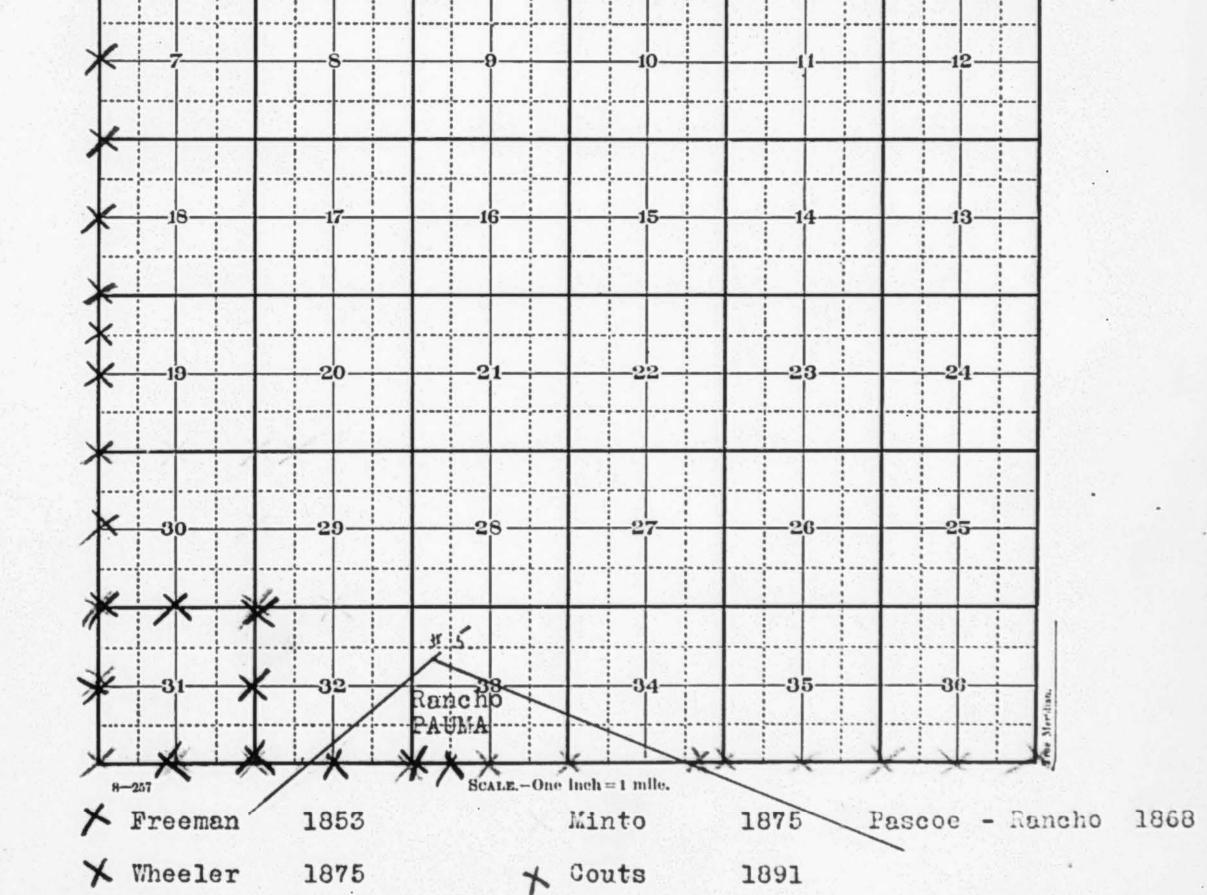

* Couts

1891

S.B.M.

Form 974.

T. 9 S. T. 1 W

1875



S.B. T. 9 S. R. 1 W. S.B.M.

West in sec. 4 (T 10 S. R. 1 W.)

80.00 ----- Va. 12° 15' E.

Thence North

50.75 To cor. of secs. 32 and 33 on S.B. of T. 9. Set post and build mound of rock and earth with trench as per inst.

East bet. secs. 4 and 33.

Va. 12° 15' E.

23.00 To base of mountain, course NW.

Set post and made mound with trench, deposited rock 5 x 8, as per inst.

.West on S.B. of sec. 32.

Va. 12° 15' E.

40.00 Set 1/4 sec. post, from which a

Sycamore 16 in. dia. brs. N. 872° W. 450 lks. dist.

47.50 Enter Indian field, course SW. & NE.

49.50 Leave same, course SW. & NE.

55.00 A trail NW. & SE.

80.00 Set post cor. of secs. 5, 6, 31 and 32, from which a Black oak 24 in. dia. brs. S. $35\frac{1}{2}^{\circ}$ W. 342 lks. Black oak brs. N. 20° E. 398 lks.

Land level, and except spots of boulders, is good, 2nd rate.

Loam and sand.

West bet. secs. 6 and 31. Tp. 9 S.

Va. 12° 15' E.

- 10.00 A road course SE. & NW. to old Mission.
- 20.00 A stream 6 lks. wide course S.
- 34.60 Creek 70 lks. wide course NW., clear and rapid, flows along the base of impassable mountain.

Set post, from which a

Sycamore 10 in. dia. brs. N. 20° E. 25 lks.

Sycamore 7 in. dia. brs. N. 40° W. 95 lks.

Soil, part 2nd rate. Part, rocky, weeds and some grass.

North bet. secs. 31 and 32.

Va. 12° 15' E.

28.50 Stream 6 lks. wide course SW.

40.00 Set 1/4 sec. post, from which a

Black oak 20 in. dia. brs. N. 11° W. 110 lks.

Black oak 16 in. dia. brs. N. 10° E. 77 lks.

62.00 To canon course W.

64.50 Stream 7 lks. wide course SW.

70.00 Leave canon, course S.S.W.

80.00 Set post cor. of secs. 29, 30, 31 and 32.

Deposited rock 6 x 10, and raised mound with trench as per inst.

Land rocky. N. of canon, level, good, 2nd rate.

Dec. 19, 1853

West bet. secs. 30 and 31.

Va. 12° 15' E.

- 40.00 Set 1/4 sec. post. Deposited rock 5 x 6 and raise mound with trench as per inst.
- 67.00 Road course NW. & SE.

S.B. T. 9 S. R. 1 W. S.B.M.

80.00 Set post cor. of secs. 30, 31, 25 and 36, from which a Black oak 10 in. dia. brs. N. 30° W. 217 lks.

Made trench as per inst.

Point in range of mountains brs. N. 25° E.

Sand and loam, 2nd rate, some weeds.

December 20, 1853

JAMES E. FREEMAN

Vol. 250-4

E.B. T. 9 S. R. 2 W. S.B.M.

From the established cor. to secs. 25, 36, 30 and 31, on E.B. of Tp. South bet. secs. 31 and 36.

Va. 12° 15' E.

- Henderson's house brs. S. 29° W.

 Welty's house brs. S. 29° E.

 Sent flag ahead across the river, and measured E. 4.00 chs. and
 - Sent flag ahead across the river, and measured E. 4.00 chs. and triangulated; flag brs. S. 24° W. 8.98 chs. dist. ahead.
- 26.98 To S. bank of river, 150 lks. wide, runs W.
- 36.50 Point from which Henderson's house brs. N. 55° W. Welty's house brs. S. 85° E.
- 39.00 Leave valley and ascend.
- 40.00 To a black oak, 3 in. dia. on N. face of rough mountain, marked for 1/4 sec. cor. Dropped the line at this point, as the mountain is too rough to survey.

 Land mesa, dry, stony, 3d rate. Valley 2nd rate.

 Timber, black oak in valley.

3.

E.B. T. 9 S. R. 2 W. S.B.M.

From cor. to secs. 25, 36, 30 and 31, North bet. secs. 25 and 30.

Va. 12° 15' E.

- 3.00 A ravine 30 lks. wide runs W.
- 8.00 Road from Pala to Pauma, course E. & W.
- 9.60 A trail course NE. & SW.
- 18.50 Enter a ravine, running SW.
- 23.25 A creek 8 lks. wide runs SW. & leave ravine.
- 40.00 Set oak post 3 in. dia. 4 ft. long 12 in. in ground in earth mound with pits 18 ins. sq. and 12 ins. deep, for 1/4 sec. cor.
- 44.50 An oak 20 ins. dia. on line.
- 44.75 Road to Aqua Tepia, course E. & W.
- 66.00 A ravine 40 1ks. wide runs SW.
- 80.00 Deposited charred stake, and set oak post, 4 ft. long, 3 ins. dia. in stone mound at E. base of rough hill, for cor. to secs. 24, 25, 30 and 19.

Double oak 12 in. dia. S. 482° E. 265 lks. dist.

Oak 9 in. dia. N. 52° E. 265 lks. dist.

Land level, stony mesa, 3d rate.

Timber, scattering black oak.

North bet. secs. 19 and 24.

Va. 1240 E.

- 17.00 A gully 25 lks. wide runs SE. & ascend.
- 36.00 Top of high, rocky ridge, course E. & W.
- 40.00 Set an oak post 4 in. dia. 4 ft. long 12 in. deep in earth mound on N. face of rough hill, for 1/4 sec. cor., pits being 18 in. sq. and 12 ins. deep.

E.B. T. 9 S. R. 2 W. S.B.M.

E.B. T. 9 S. H. 2 W. S.B.M.

Va. 122° E.

- 45.00 A ravine 150 1ks. vide runs W.
- 61.15 A black oak 12 in. dia. on line.
- 61.50 On high ridge course E. & W.
- 67.50 On high ridge course E. & W.

 Set granite stone 16 x 10 x 10 for witness cor. to secs. 13, 24,

 18 and 19.

Louis Castro's house brs. N. 232° E.

Sent flag ahead across an impassable canon and measured E. 6.00 chs. and triangulated, flag brs. N. 17° W., dist. 19.62 chs. ahead, making

87.12 To flag N. side of canon. Measured S. 12 lks., deposited charred stake, and set an elder post, 4 ft. long 4 ins. dia. in stone mound for witness cor. to secs. 13, 24, 18 and 19, 7 chs. N. of true cor. Louis Castro's house brs. N. 64° E.

Land, rough hills, 4th rate.

Timber, oak and sycamore in deep canon.

North bet. secs. 13 and 18.

Va. 121 E.

- 7.00 Witness rost.
- 17.00 Point from which Louis Castro's house brs. N. 16° W.
- 25.00 A road course NW. & SE. Enter level mesa.
- 40.00 Set sycamore post, 3 ins. dia. 4 ft. long 12 ins. deep in stone mound on mesa, for 1/4 sec. cor.
 - Lucio Castro's house brs. N. 64° W.
- 53.25 Irrigating ditch 5 lks. wide runs SW.

 Leave mesa and enter rough foot hills of Smith's mountain.

- 63.00 A rocky gulch 75 lks. wide runs W.
- 69.00 A ravine 50 lks. wide runs SW.
- Deposited charred stake and set an oak post, 4 ft. long 4 inc. dia.

 12 ins. deep, in earth mound on top of a sharp ridge, running E. &

 W., for cor. to secs. 7, 12, 13 and 18; also drove another stake,

 2½ in. sq. marked like the true cor. in the pit, SE. of the cor.

 The pits are 18 ins. sq. 12 ins. deep and 6 ft. from cor. post.

 Land rough hills, 4th rate. Mesa 2nd rate.

 Timber, scattering black oak.

February 18, 1875

North bet. secs. 7 and 12.

Va. 13° E.

- 6.00 Head of canon 100 lks. wide runs SW.
- 27.00 Top of high ridge runs W. Descend.
- 33.00 A gully 25 lks. wide runs NW.
- 40.00 A black oak 15 in. dis. marked for 1/4 sec. cor.
- 43.00 A timbered revine 150 lks. wide runs SW., ascend and follow along ridge.
- 80.00 To top of ridge, set oak post 4 ft. long 4 ins. dia., in stone mound for cor. to secs. 1, 12, 6 and 7.

Land, rough mountains, valueless.

Timber, oak and scattering pine in canons.

The country is too rough to continue the line further.

February 19, 1875

Vol. 300-34

M. G. WHEELER.

6.

T. 9 S. R. 1 W. S.B.M.

I begin at the established cor. to secs. 29, 30,31, 32 and run thence

East bet. secs. 29 and 32 on true line.

Va. 12° 40° E.

- 14.80 A creek 12 1ks. runs S. in deep canon.
- 31.00 Brow of steep hill, E. & W.
- 40.00 Set granite stone 10 x 10 x 6 ins. for 1/4 sec. cor., on SW. 1/4 slope of chaparral mountain.

Soil 2nd rate to 30 chs., thence 3d rate.

Alder and sycamore in canon; on advance abrupt mountains.

North bet. secs. 29 and 30

Va. 13° 40' E.

- 2.40 Brush fence E. & W.
- 28.00 Enter Utt's orchard, E. & W.
- 35.40 Thence E. & W. Leave orchard for Springland.
- 39.30 Thence E. & W.
- 40.00 Set a post for 1/4 sec. cor.

A Live oak 36 in. dia. brs. I. 88° E. 119 1ks.

A Sycamore 13 in. dia. brs. N. 51° W. 76 lks.

SE. cor. Utts' house brs. N. 81° W.

- 40.70 A furnace.
- 40.90 Spring flows S. Leave soft land.
- 41.50 Enter orchard and vineyard, E. & W.
- 48.50 Leave orchard, SE. cor. house brs. S. 41° W.
- 50.50 To bank of canon running W., measure E. 10 chs., whence flag on S. slope of mountain N. of canon brs. N. 22° E. latitude, 24.69 chs.

T. 9 S. R. 1 W. S.B.M.

- 53.60 Creek , 8 1ks. wide runs W. in canon.
- 75.19 To flag.
- 80.00 Set granite stone 28 x 18 x 7 in. in stone mound, for cor. to secs.

 19, 20, 29, 30, on S. slope of mountain.

 Land level, and rises N. to 50 chs. Soil 1st rate.

 Thence chaparrel mountain.

East , true line bet. secs. 20 and 29.

Va. 11° 6' E.

- 10.00 Ridge sloping SW.
- 20.00 Set granite stone 15 x 14 x 6 ins. for witness cor.

 In advance, canon and abrupt broken mountains.

West on random line bet. secs. 19 and 30.

Va. 11° 6' E.

- 9.40 Brook 2 1ks., S. 30' E. in canon.
- 40.00 Set temp. 1/4 sec. cor.
- 48.00 Summit of spur, sloping S.
- 80.54 Int. W.B. 36 lks. N. of cor. to secs. 19, 24, 25, 30, thence N. 89° 45' E., true line bet. secs. 19 and 30.

Va. 12° 30' E.

- 40.54 Set granite stone 30 x 18 x 12, for 1/4 sec. cor.
- 80.54 To cor. to secs. 19, 20, 29, 30.

 Along S. slope of mountain. Soil 3d rate.

March 3, 1875

8.

Vol. 300-33

WILLIAM MINTO.

N.B. T. 10 S. R. 1 W. S.B.M.

Commencing from witness cor. Tps. 9 and 10 S. which I found on N. face of spur projecting W. from main mountain and is a pile of stone 30 ins. high 40 ins. base, none of the stones marked and there is only one tree left to witness this cor., and that is a Black oak 26 ins. in dia. S. 50° W. 96 lks. dist.

I ran

North bet. secs. 1 and 6, descending.

Va. 13° E.

- 6.00 Canon stream of water 10 lks. wide course S. 15° W. 150 ft.
 Ascending steep rocky slope of canon.
- Set granite rock 28 x 16 x 14 ins. marked with 6 notches on N. E.

 S. & W. edges for cor. to Twps. 9 and 10 S. R. 1 W. and 9 and 10 S

 R, 1 E. and raised a mound of stone around it.

 This cor. is on the W. side of steep canon.

 Land very broken, soil worthless.

March 26,

From cor. to Tps. 9 and 10 S. on Meridian, I ran
West on random, setting temp. cor. at every 40 and 80 chs.

Va. 13 E.

179.10 Int. Pauma ranch line.

- March 27th.
- 298.20 Base of mountain, I find no trace of any mound or anything else, to designate a cor., so I continue WEST on random.
- 322.60 Int. W.B. sec. 4, 264 lks. S. of cor. to secs. 32 and 33, T 9 S R lW.

 This cor. is an Elder post 3 ins. in dia. in stone and earth mound.

 No marks. This falling being 65 lks. per mile.

 I ran

N.B. T. 10 S. R. 1 W. S.B.M.

S. 89° 32' E. on true line along N. Bdy. of sec. 4.

Va. 13° E. March 28th.

Ascending.

- 23.00 Foot of steep mountain, no sign of any cor.
- 40.00 Left small mound of stone on line.
- 64.00 Ridge sloping SW. + 240 ft. Descend.
- 82.60 Left mound of stone on line.
- 94.00 Foot of mountain, ravine 80 lks. wide course S.

 Ascend along S. slope of mountain.

 March 30th.
- 143.50 Int. Pauma Rancho line here. I set a granite rock 20 x 14 x 10 in. marked R.P. on W. face for intersection cor. and raised a mound of stone around it. This cor. is on SW. slope of mountain and 199.20 chs. N. 634° W. of intersection of Ranch line with Meridian line.
- Set granite rock 26 x 12 x 4 ins. marked with 2 notches on L. and 4 notches on W. edges for cor. to secs. 3 and 2 on N.B. of Tp. and raised a mound of stone around ot. This cor. is on S. slope of main range of mountains.

Land broken, soil worthless.

From cor. to secs. 3 and 2 on N.B of Tp. I ran S. 89° 32' E. along N.B sec. 2, ascending.

Va. 13° E.

- 13.00 Ridge projecting SW. from main Mt. + 60 ft. Descend.
- 16.40 Creek 6 lks. wide course S. Ascend bare mountain.
- 23.90 Trail SW. & NE.
- 38.00 Ridge sloping SE. + 250. Descend.
- 40.00 Set granite rock 14 x 12 x 10 ins. 8 ins. in the ground for 1/4 cor secs. 35, 2, marked with 1/4 on N. face and raised a mound of stone

9.

N.B. T. 10 S. R. 1 W. S.B.M.

around it. This cor. is on the E. face of a spur which projects SE. from main mountain.

- 42.60 Creek 04 lis. wide in bottom ravine course SE. 100. Ascend.
- 61.00 Ridge sloping S. + 400. Descending along E. face of spur which projects S. from main mountain.
- Set granite rock 30 x 16 x 4 ins. fro cor. to secs. 35, 36, 2, 1, marked with 5 notches on W. and 1 notch on E. edges and raised a mound of stone around it. This cor. is on E. face of spur.

 The land along this mile is steep, soil rocky and 3d rate.

From cor. to secs. 2 and 1 on N.B, of Tp. I ran S. 89° 52' E. along N.B, sec, 1. Descending.

4.20 Creek 03 lks. wide in bottom of ravine, some oak timber - 150.
Ascending brushy rocky slope.

Va. 13° E.

- 32.00 Ridge sloping S. + 300 . Indian trail along ridge. Descending.
- 40.00 Set granite rock 18 c 15 x 10 ins. 10 ins. in the ground for 1/4 cor. secs. 36, 1, marked 1/4 on N. face and raised a mound of stone around it. This cor. is on E. face of spur which projects S. from main mountain.
- 52.00 Creek 07 lks. wide in bottom deep canyon course S. 300.

 Ascending steep brushy rocky mountain with scattering oaks and yellow pines.
- 61.00 Yellow pine 12 ins. in dia. 15 lks. S. of line.
- 78.00 Ridge sloping S., very broken and rocky + 400. Descending.
- The land along this mile is very broken, soil rocky and worthless.

 April 2, 1891

 Vol. 129-24

 CAVE J. COUTS.

E.B. T. 9 S. R. 2 W. S.B.M.

Commencing from cor. to secs. 1, 12, on E.B. of Tp., which is a burned oak post in stone mound on ridge of spur projecting Sw. from Smiths Mountain, I run

North on true line bet. secs. 1 and 6.

Va. 13° E.

- 6.00 Top of ridge. Descend.
- 18.00 Ravine, timber and water, course SW. Ascend.
- 37.00 Top of ridge projecting SW. from Smiths' Mt. and continue along W. face of Mt.
- 40.00 Set granite rock 6 x 12 x 16 ins. for 1/4 cor. secs. 1 and 6, marked 1/4 on W. face and raised a mound of stone around it.

 This cor. is on W. slope of Smith's Mt.
- 59.00 Ridge sloping W. Descend along NW. slope of mountain.
- 63.40 Ravine 60 lks. wide course NW.
- Int. N.B. of Tp. Here I find a stone mound. No marks, 29 lks. ".

 of my line, I destroy this and set a granite rock 14 x 20 x 26 ins.

 for closing cor. to Tps. 9 S. Rs. 1 and 2 W. marked C.C. on N. face
 and 6 notches on S. & W. edges. This cor. os on NW. face of rocky

 mountain and is 19.48 chs. W. of stone mound on W.B. of sec. 31,

 T. 8 S. R. 1 W.

The land along this mile is very broken, burnt brush.

Soil, rocky and absolutely worthless.

April 21st.

From 1/4 sec. cor. bet. secs. 31 and 36, which is an oak post 3 ins. dia. in M.M.Sicklers ditch on N. face of brushy mountains. This post, Mr. Sickler tells me that when he was making his ditch in 1881 for his water power, he sent 2 Indians ahead clearing ditch line.

E.B. T. 9 S. R. 2 W. S.B.M.

and that when he came up to this point, he found that the Indians had chopped down the oak tree, which was blazed and marked 1/4 on W. face, and that there and then, he took the same tree and drove it down about 12 ins. into the ground at the identical spot where it first stood.

M.M. Sicklers house brs. N. 10° E. 300 1ks.

M.M. Sicklers Grist Mills brs. N. 5° W. 200 1ks.

M.M. Sicklers Mill house brs. N. 4° W. 350 lks.

In order to better perpetuate this cor., I marked a granite boulder 3 ft. high 5 ft. in dis. which projects N. from mountain over ditch and 4 ft. S. of true cor. with W. 1/4 on N. face for witness to true cor.

From here I ran

South on random. Ascending.

Va. 14° E.

Int. H.B. Sec. 6, T. 10 S. R. 1 W. 294 lks. E. of cor. Tps. 9 and 10 S. Rs. 1 and 2 W. which is a granite rock 6 x 8 ins. 12 ins. out of the ground marked with 6 notches on each edge.

From here I ran

N. 4° 12' E. Ascending on true line bet. secs. 36 and 31.

Va. 14° E.

- 4.00 Ridge overlooking the San Luis Rey valley. Then descend along N. slope of brushy mountain.
- 17.60 Ravine 80 lks. wide course NW.
- 27.00 Ravine 50 lks. wide course NW.
- 33.00 Foot of mountain, continue along bench.
- 36.00 Foot of hill. Ascend.

E.B.T 9 S. R. 2 W. S.B.M.

- 38.50 Ridge course E. & W. Descend.
- 39.85 To 1/4 cor. bet. secs. 36 and 31.

The land along this 1/2 mile is broken and steep, very broken and steep, very brushy. Soil is rocky, 2nd and 3d rate.

April 23, 1891

CAVE J. COUTS.

Vol. 129-16

S.B. T. 9 S. R. 1 W. S.B.M.

Having already, under contract of June 12, 1890, connected with the 1/4 sec. bet. secs. 31 and 36 in Tps. 9 S. Rs. 1 and 2 W., and with the 1/4 witness cor. bet. secs. 31 and 6, Tps. 9 and 10 S. R. 1 W. from Tp. cor. Tps. 9 and 10 S. Rs. 1 and 2 W. I commence from the said Tp. cor. and run

N. 89° 34° E. on true line bet. secs. 31 and 6.

Ascending.

Va. 14° E.

- 6.00 Rocky brusny ridge, descending along N. Jace of brushy rocky mountain.
- 23.00 Ravine 60 lks. deep 100 lks. wide course N.
- 30.60 Large black boulder on line.
- Set granite rock 20 x 12 x 6 in. for 1/4 sec. 31, 6, marked 1/4 on N. face and raised a mound of stone around it.

 This cor. is on N. face of brushy rocky mountain.
- 46.00 S. bank of San Luis Rey river.
- 47.50 Edge of San Luis Rey river 80 lks. wide course NW.
- 48.97 To 1/4 witness cor. secs. 31, 6.

 Land broken and brushy, soil rocky and worthless.

S.B. T. 9 S. R. 1 W. S.B.M.

From here I ran EAST

Va. 14° E.

34.60 To cor. secs. 31, 32, 6, 5.

May 14th.

From cor. to secs. 26, 25, 35, 36, I ran East bet. secs. 25 & 36. (T. 9 S. R. 2 W.)

Va. 13° E.

82.28 To cor. secs. 25, 30, 36, 31, which is an elder post 4 ins. in dia. in earth mound marked S. 25 S. 30 S. 36, S. 31.

May 17th.

From cor. secs. 25, 30, 36 and 31, I ran East bet. secs. 30, 31 (T 9 S R 1 W)

Va. 12° 15' E.

80 23 To cor. secs. 30 29, 31, 32, which is an oak post in earth mound, post burnt off 6 ins. from ground, no marks.

From cor. secs. 50, 29, 31 and 32, I ran SOUTH

Va/ 13° E.

79.78 To cor. secs. 31, 32, 6, 5.

> From cor. to Tps. 9 and 10 S. Rs. 1 and 2 W., I ran N. 4° 12' E. bet. secs.31 and 36 Ascending. Va. 14° E.

- Ridge overlooking the San Luis Rey valley, descend along N. slope 4.00 of brushy mountain.
- 17.50 Ravine 80 lks. wide course NW.

27.00 Ravine 50 lks. wide course NW.

33.00 Foot of mountain, continue along bench.

36.00 Foot of hill, ascend.

38.50 Ridge course E. & W. Descend.

39.85 To 1/4 cor. bet. secs. 36 and 31, and is an oak post 3 ins. in dia. in M.M. Sicklers ditch on N. face of brushy mountain. This post Mr. Sickler tells me that where he was making his in 1881 for his weter power, he sent 2 Indians ahead cleaning ditch line and that when he camo up to this point he found that the Indians had chopped down the oak tree that was blazed and marked 1/4 on W. face and that there and then he took the same tree and drove it down about 12 ins. into the ground at the identical spot where it first stood.

M.M. Sicklers house brs. Nº 10° E. 300 las.

M.M. Sicklers Grist Mill brs. N. 5° W. 200 lks.

M.M. Sicklers Mill house brs. N. 4° W. 350 lks.

Granite boulder 3 ft. high 5 ft. in dia. projecting N. from mountain over ditch, marked W. 1/4 on N. face and is 4 ft. S. of true 1/4 cor.

From here I ran

North bet. secs. 36 and 31.

Va. 13° E.

To cor. secs. 25, 30, 36, 31. 40.12

CAVE J. COUTS.

Contract June 12, 1890

Vol: 129-15

Ed Fletcher Papers

1870-1955

MSS.81

Box: 42 Folder: 15

Business Records - Field Notes - Township 9 S., Range 1 W., San Bernardino Meridian



Copyright: UC Regents

Use: This work is available from the UC San Diego Libraries. This digital copy of the work is intended to support research, teaching, and private study.

Constraints: This work is protected by the U.S. Copyright Law (Title 17, U.S.C.). Use of this work beyond that allowed by "fair use" requires written permission of the UC Regents. Permission may be obtained from the UC SanDiego Libraries department having custody of the work (http://libraries.ucsd.edu/collections/mscl/). Responsibility for obtaining permissions and any use and distribution of this work rests exclusively with the user and not the UC San Diego Libraries.