



D DYNAMIC CASSETTE

POSITION SELECTOR

Normal (TYPE I)	Bias: Normal EQ: 120µs
-----------------	------------------------

TDK D 90 (135m) 90min.
@ 1-7/8ips (2 × 45min.)



Tips on Handling and Storage

- The tape should be wound snugly on the cassette reels; if the tape is loose, carefully wind it on to one of the reels by gently turning one of the hubs.
- Keep the recorder head and pinch roller clean by regular use of a good cassette head cleaner (like TDK's HC-1, head cleaner cassette).
- Avoid prolonged exposure of cassettes to excessive heat (should be kept below 110°F/45°C), humidity, direct sunlight and strong magnetic fields.
- To preserve valuable or prized recordings, punch out and remove the erasure prevention lug on the top edge of the cassette.

TDK Cassettes are manufactured and shipped under the strictest quality control standards. If this product proves to be defective in materials or workmanship, it will be replaced. TDK will not be liable for any injury, loss or damage, direct or consequential, arising out of the use of, or the inability to use this product.

TDK CORPORATION
13-1, Nihonbashi 1-chome, Chuo-ku, Tokyo 103, Japan

© 1985 TDK CORPORATION
Compact Cassette
MADE IN JAPAN

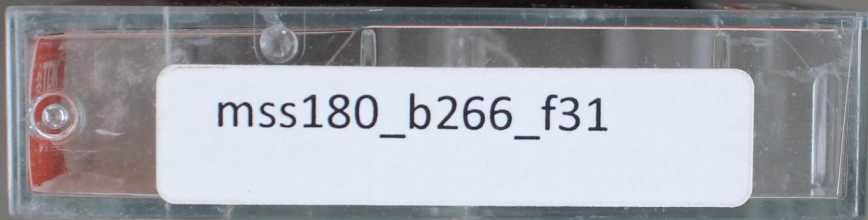

mss180_b266_f31